


PERFORATED PROFILED STEEL SOFFIT

- Available in **G-Rib, D-Rib** and **R-Rib** profiles
- Available in all Easy Building Products colours
- No extra screening required
- Good looking solution to soffit air intake
- 3/32" perforation holes

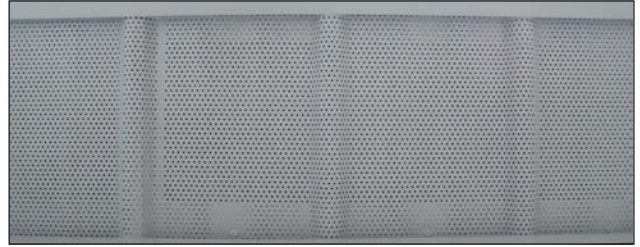

PERFORATED TRIM SOFFIT(EV-1)

Optimal attic ventilation is done by having at least 1 square foot of ventilation for every 150 square feet of attic space by using a combination of 50% vented soffit and 50% ridge vent

- Eave Fascia Soffit with perforated holes
- 1/2" holes at 6" on centre
- Up to 5 rows 2" apart for maximum ventilation



ENVIRO-VENT (EV2-G)(EV2-E)

- For use under ridge cap
- Conforms to G-Rib(EV2-G) and Easy Shake(EV2-E) profiles
- Fast, easy and economical to install in 36" lengths
- 51 sq. inches of net free area per pc




48" LOW PROFILE VENTILATORS (EV-3)

- Use 1 low profile vent per 1170 sq. ft. of attic area




8' RIDGILATORS (EV-4)

- Use 1 ridgulator per 560 sq. ft. of attic area
- EV-4DK - Deflector Kit (Also Shown)
 - Recommend for use with Ridgulator on 6/12 pitch or more

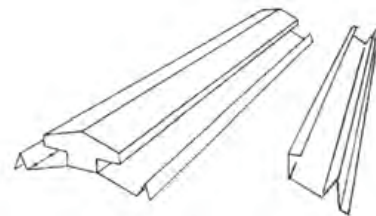

WALL LOUVRES (EV-WL)

- Complete with bug screen or bird screen
- Custom sizes available
- **Special order**

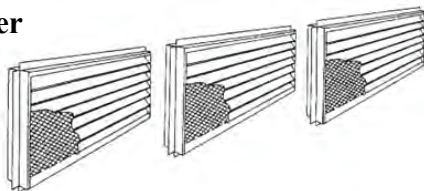

ROUND VENTILATORS (EV-ROUND)

- Available in 12" throat size
- Use one 12" vent per 390 sq. ft.
- **Special order**



“Working Hard For Your Success”

73000 Airport Line, P.O. Box 137 Hensall, Ontario N0M 1X0

Phone: 519-263-3107 Toll Free: 1-888-763-7779 Fax: 519-263-3108 www.easybuildingproducts.ca